





For install de door, is necessary positioned it before, for then fix the door.

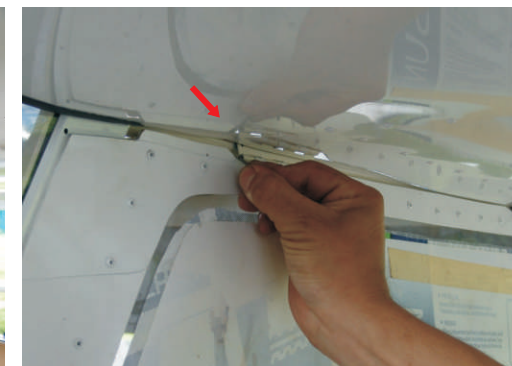

Once positioned the door, fix the pin to the front hinge of the door.

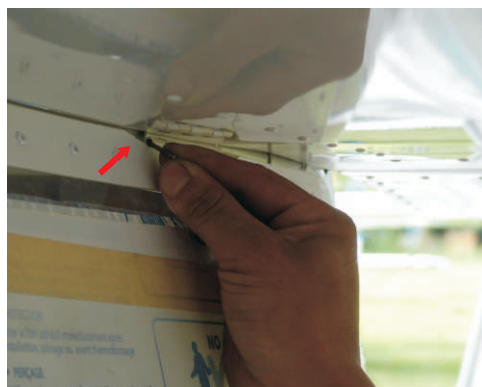

Later on, fix the door in its back part with a pin in the hinge.



Once positioned the doors you proceeds to install the gas spring, these insured to the inferior supports and the superior supports in the doors. This process is for each side of the airplane.